

# State

Linda Marshall and Vreda Pieterse

Department of Computer Science  
University of Pretoria

17 and 18 August 2015

# Overview


- 1 Identification
- 2 Structure
- 3 Participants
- 4 Related Patterns
- 5 Example
  - Traffic lights
  - Amber after red
  - UK Traffic lights

## Name and Classification:

State (Behavioural)

### Intent:

“Allow an object to alter its behaviour when its internal state changes. The object will appear to change its class.” GoF(305)

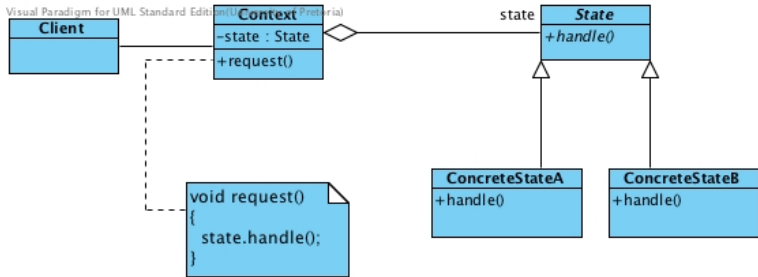

The State design pattern is effective when:

- **an object becomes large** - state of the object is managed externally to the object itself
- **an object can experience an extensive number of state changes** - specifically when flow-control is characterised by multiple *if* or *switch* statements. State is managed externally, by modelling each state as an individual object.

Changing the state of an object will influence the behaviour of the object at run-time.



## State

- Defines an interface for encapsulating the behaviour associated with a particular state of the Context.

## ConcreteState

- Implements a behaviour associated with a state of the Context.

## Context

- Maintains an instance of a ConcreteState subclass that defines the current state.
- Defines the interface of interest to clients.

## Related Patterns


- **Strategy(315)**: State and Strategy have the same structure and apply the same techniques to achieve their goals, but differ in intent. Strategy is about implementations which accomplish the same result. One implementation can replace the other as the strategy requires. State is about doing different things based on the state, this relieves the caller from the burden of accommodating every possible state.



## Related Patterns cont.

- **Singleton or Prototype** (127 and 117):  
When implementing the State pattern, the programmer has to decide on how the state objects will be created. Often the application of the Prototype pattern will be ideal. State objects are also often Singletons.
- **Flyweight**(195): State objects can be shared by applying Flyweight.

## Class diagram from existing code

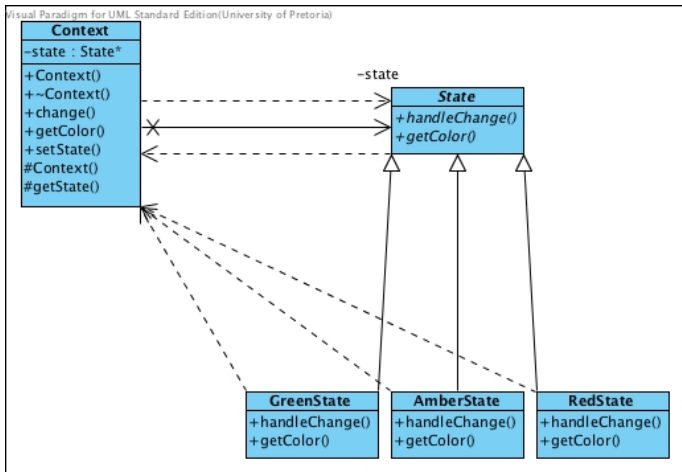

```
int main(){
    Context* context = new Context();
    for (;;) {
        cout << "Traffic_light_is_currently:_"
              << context->getColor() << endl;
        context->change();
    }
    delete context;
    return 0;
}
```

```
class Context {  
public:  
    Context();  
~Context();  
void change();  
string getColor();  
void setState(State* state);  
  
protected:  
    Context(State* state_);  
State* getState();  
private:  
    State* state;  
};
```

```

class State {
    public:
        virtual void handleChange(Context* c) = 0;
        virtual string getColor() = 0;
};

class RedState : public State {
    public:
        virtual void handleChange(Context* c);
        virtual string getColor();
};

class GreenState : public State {
    public:
        virtual void handleChange(Context* c);
        virtual string getColor();
};

class AmberState : public State {
    public:
        virtual void handleChange(Context* c);
        virtual string getColor();
};
  
```

Note the dependency on Context in State and the subclasses. This results in a circular dependency. State must be defined before Context, which in turn must be defined before State. How do we resolve this?

```
class State;  
  
class Context {  
    // as above  
};  
  
class State {  
    // as above  
};  
  
class RedState : public State {  
    // as above  
};  
  
// same for GreenState and AmberState
```


```

Context::Context() {
    this ->state = new RedState();
}
Context::~~Context() {
    delete this ->state;
}
Context::Context(State* state_) {
    this ->state = state_;
}
State* Context::getState() {
    return state;
}
void Context::setState(State* state) {
    delete this ->state;
    this ->state = state;
}
void Context::change() {
    state ->handleChange(this);
}
string Context::getColor() {
    return state ->getColor();
}
  
```



C++11 and later compliant compilers give a compiler warning about State not having a virtual destructor. Include a virtual destructor for State with an empty implementation.

What if the sequence needs to change to:  
Red → Amber → Green → Amber ?

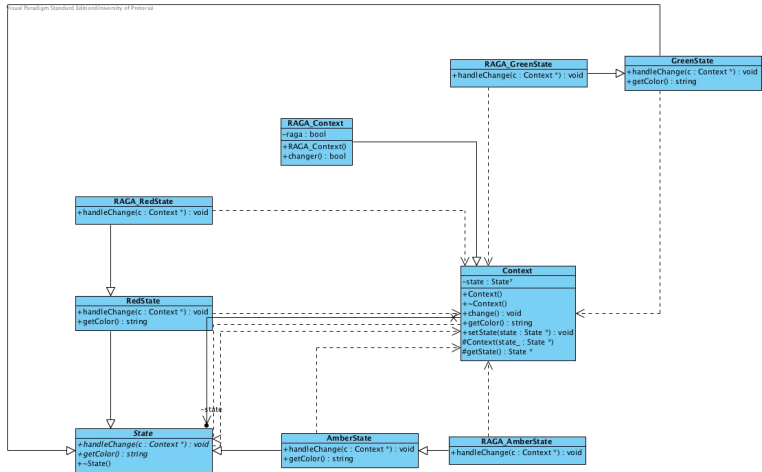

```
class RAGA_Context : public Context {  
public :  
    RAGA_Context ();  
    bool changer ();  
private :  
    bool raga ;  
};
```

In the UK the traffic lights have the following sequence, how do we model them?

